




HY-FLEX
CORP

INDUSTRY PROVEN SINCE 1970

**PROVEN
RELIABILITY**

PORTABILITY & PRODUCTION WITHOUT COMPROMISE

CM71 - Continuous Mixer

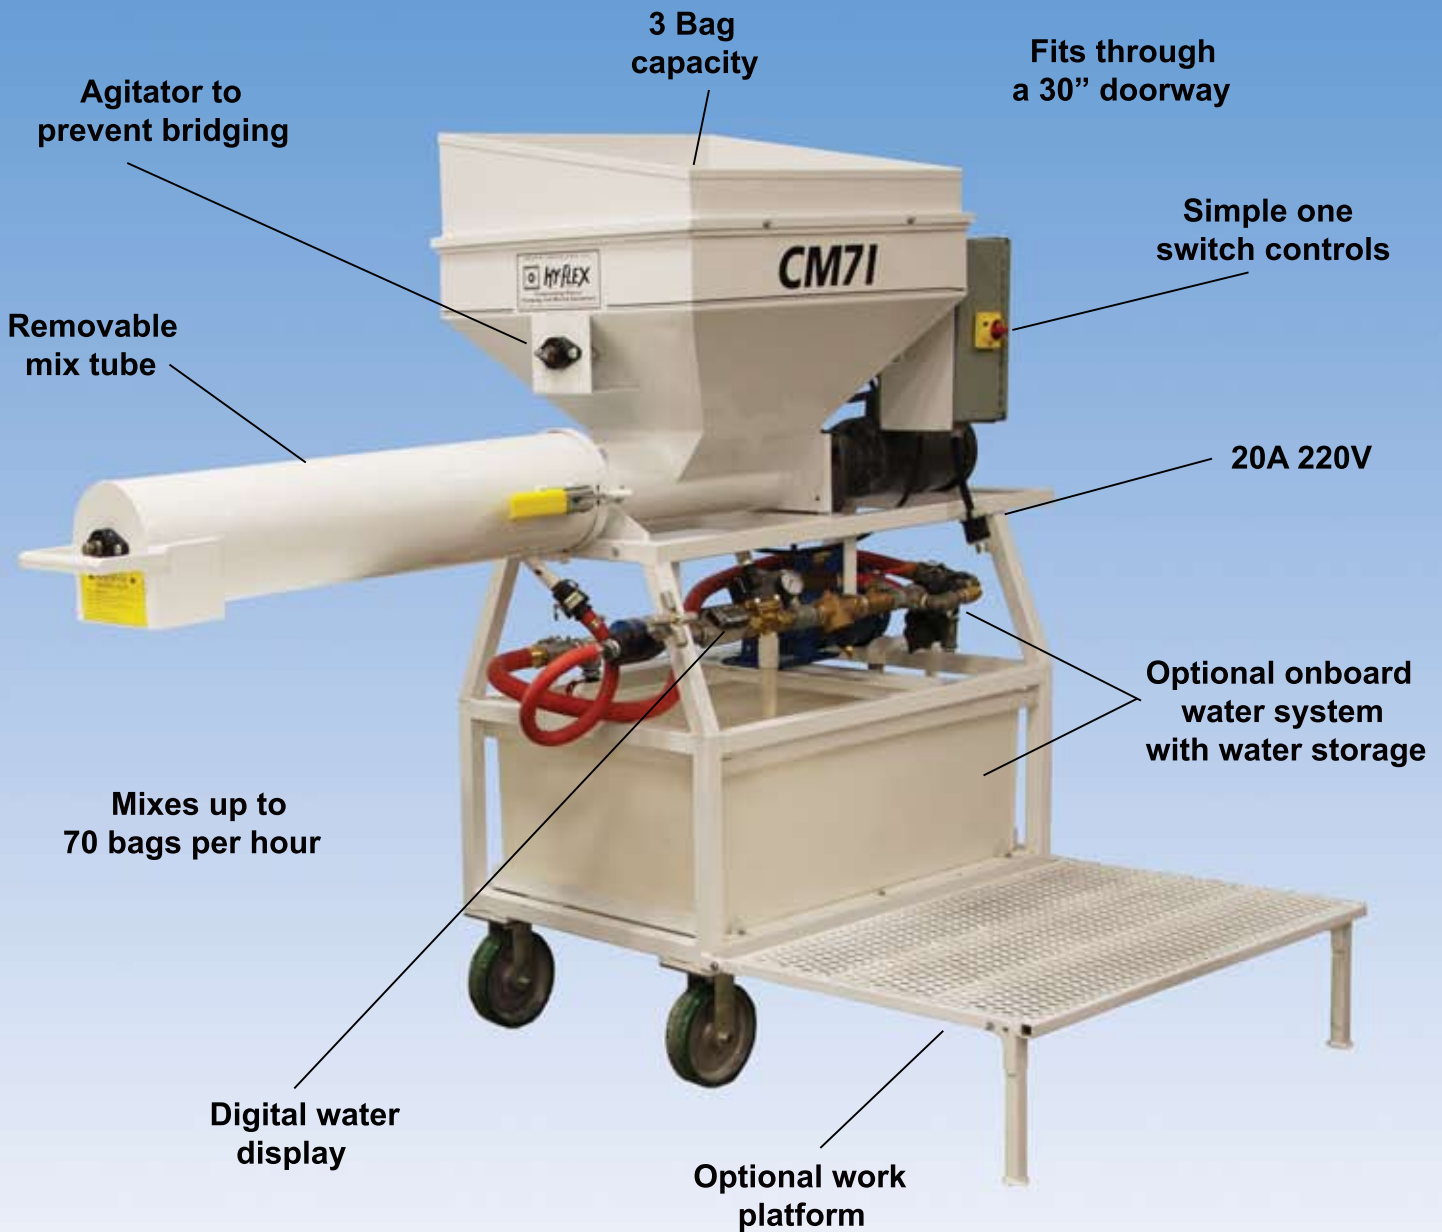

FIREPROOFING

TOLL FREE 866.849.6246

www.HYFLEXCORP.com

SPECIFICATIONS & CAPACITIES

Power	3 HP
Power Requirement	230 V Single Phase 20A
Mixer Output	70 Bags Per Hour
Hopper Capacity	3 Bags
Charge Height	54" / 137 cm
Volume Control	Single Speed
Max Aggregate Size	Fireproofing
Machine Width	28" / 71cm - 30" / 76cm (with Platform)
Machine Length	92.5" / 235 cm (with 40" mix tube)
Machine Height	70.5" / 179 cm
Machine Weight	693 lbs / 314 kg
Wheels	8" Rigid and Swivel Casters
Optional Equipment	Water System
	Work Platform

CM71



HZ-30G

30G Specifications and Capacities			
Power	13 HP Honda Gas Engine	Controls	Manual/Remote
Fuel Tank	1.7 Gal / 6.9 qts	Machine Width	33" / 84cm (48" / 122cm w/Tow Package)
Pump Output	0-10 gpm	Machine Length	84" / 213cm
Pump Size	Optimized 2L6	Machine Height	42" / 107cm
Air Output	12 cfm @ 90 psi	Machine Weight	675 lbs / 306 kg
Hopper Capacity	60 Gal	Wheels - Rear	20" OD Pneumatic
Hopper Height	30 in / 76 cm	Wheels - Front	10" OD Pneumatic Casters
Volume Control	Variable 0-10 gpm	Max Aggregate Size	.125 in / 3 mm
Pressure Output	500 PSI Maximum	Max Pumping Distance	200' (Note: It can be greater or less)
Directional Control	Forward and Reverse	Optional Equipment	Tow Package



321E

321E Specifications and Capacities			
Power	15 HP Electric	Controls	Manual/Remote
Power Requirement	208/230 volt 50A 3 PH	Directional Control	Forward and Reverse
Pump Type	3" Dual Piston	Machine Width	28" / 71 cm
Air Output	12 cfm	Machine Length	62" / 157 cm
Pump Size	2" Ball Valve	Machine Height	34" / 86 cm
Pump Output	70 Bags Per Hour	Machine Weight	1350 lbs / 615 kg
Hopper Height	23" / 58 cm	Wheels	8" Rigid and Swivel Casters
Volume Control	Variable Hydraulic	Max Aggregate Size	.187 in / 5 mm
Pressure Outout	1000 psi / adjustable	Max Pumping Distance	550' maximum

HZ-30E



30E Specifications and Capacities			
Power	5 HP Variable Speed	Controls	Manual/Remote
Power Requirement	208/240 V 30A	Machine Width	33" / 839 cm
	1 or 3 Phase	Machine Length	72" / 1829 cm
Air Output (optional)	12 cfm	Machine Height	43" / 1092 cm
Pump Size	Optimized 2L6	Machine Weight	585 lbs / 266 kg
Hopper Capacity	60 Gal	Wheels - Rear	15" / 38cm OD Pneumatic
Hopper Height	32" / 81 cm	Wheels - Front	10" / 25cm OD Pneumatic Casters
Volume Control	Variable 0-10 gpm	Max Aggregate Size	.125" / 3 mm
Pressure Outout	500 PSI Maximum	Max Pumping Distance	200' (Note: It can be greater or less)
Directional Control	Forward and Reverse	Optional Equipment	Air Compressor

HF-15 SPRAY BUDDY



Spray Buddy Specifications and Capacities			
Power	1 HP Electric	Controls	Manual/Remote
Power Requirement	110 Volt 15A	Machine Width	26" / 66cm
Pump Type	Optimized 2L3 Stator	Machine Length	54" / 137cm
Hopper Capacity	15 Gallon	Machine Height	41" / 104cm
Hopper Height	32" / 81cm	Machine Weight	190 lbs / 86kg
Volume Control	Variable 0-2 gpm	Wheels	12" OD Semi-Solid
Pressure Outout	200 PSI	Max Aggregate Size	.125" / 3 mm
Directional Control	Forward/Reverse	Max Pumping Distance	150' (Note: It can be greater or less)